



C

c

EC

The XB2301A

8



|         |  |  |  |
|---------|--|--|--|
|         |  |  |  |
| XB2301A |  |  |  |


°C

|   |  |  |    |
|---|--|--|----|
|   |  |  |    |
|   |  |  |    |
|   |  |  |    |
|   |  |  |    |
|   |  |  |    |
| 8 |  |  |    |
|   |  |  | °C |
|   |  |  | °C |




°C


|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |

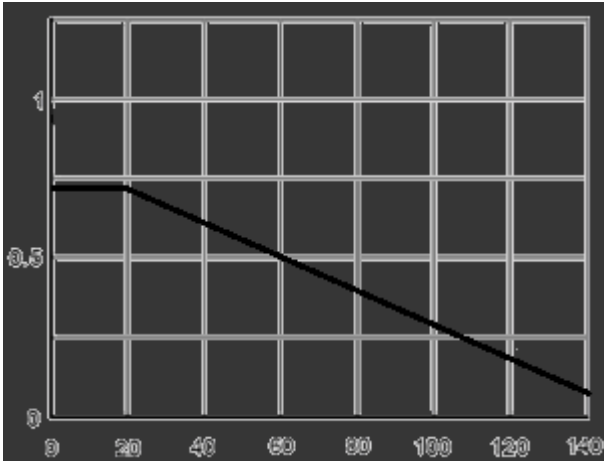


**Figure 1 Power Dissipation**

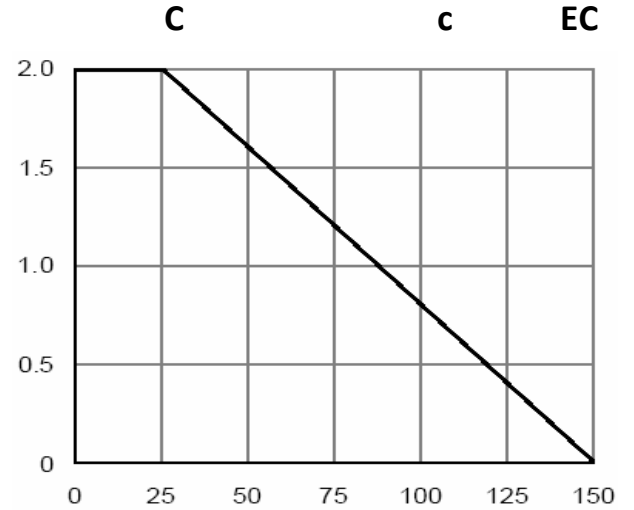


**Figure 2 Drain Current**

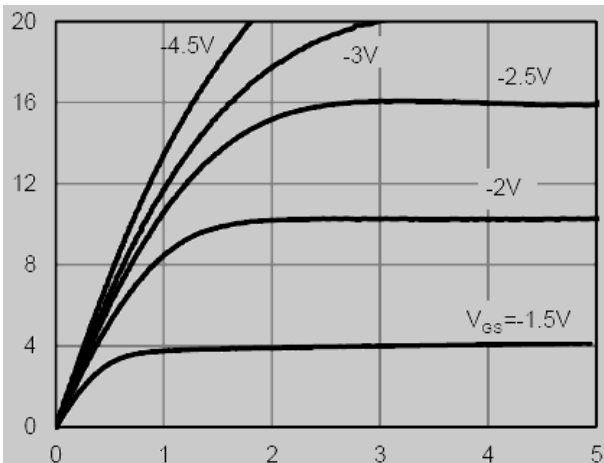


**Figure 3 Output Characteristics**

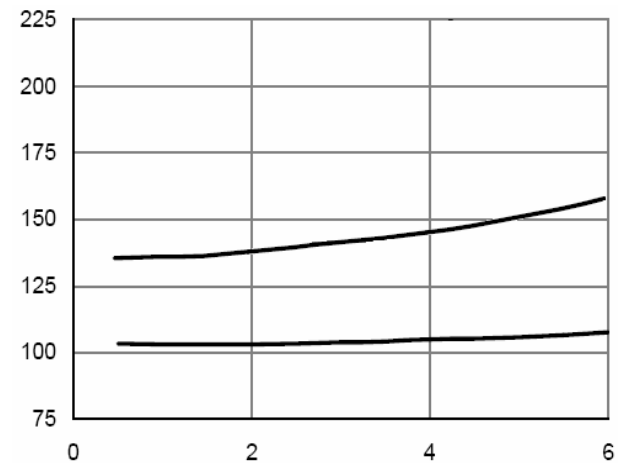


**Figure 4 Drain-Source On-Resistance**

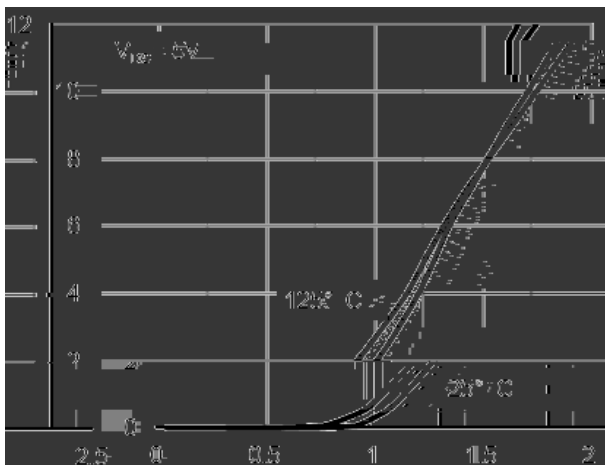


**Figure 5 Transfer Characteristics**

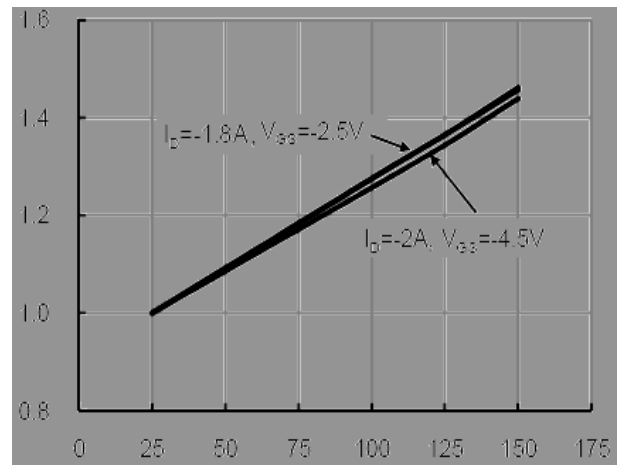


**Figure 6 Drain-Source On-Resistance**

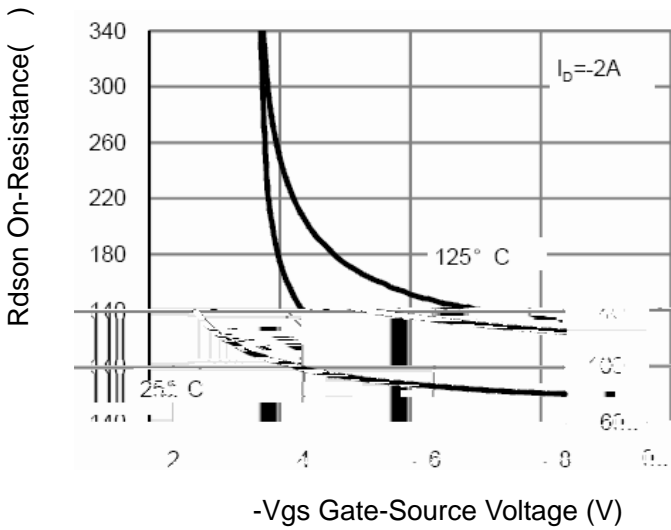


**Figure 7 Rdson vs Vgs**

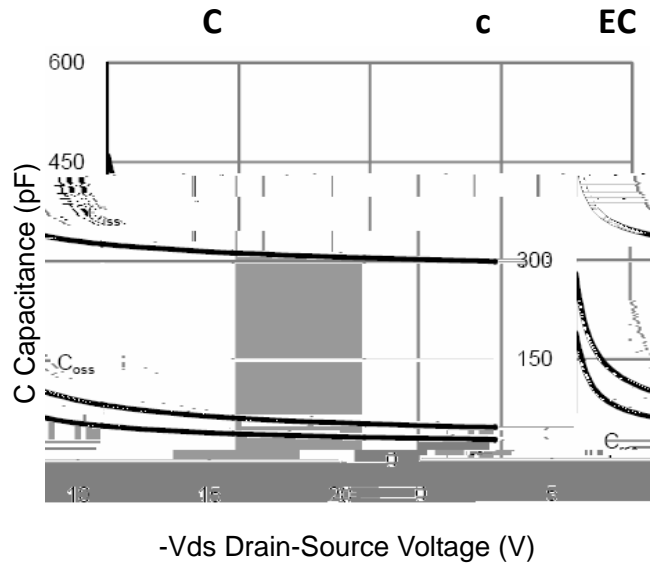


**Figure 8 Capacitance vs Vds**

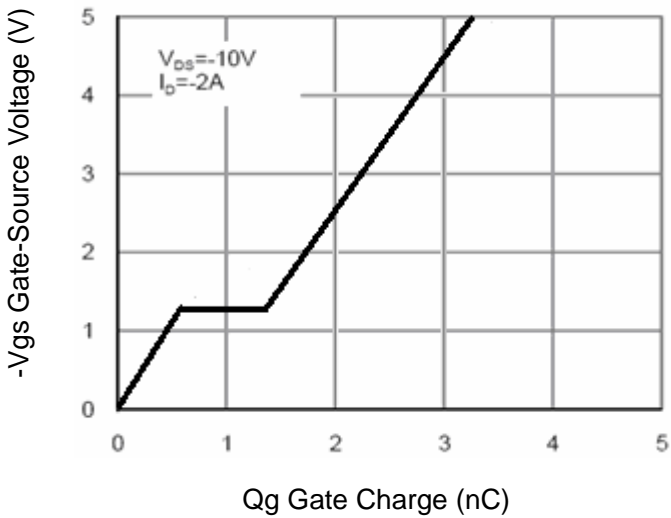

**Figure 9 Gate Charge**

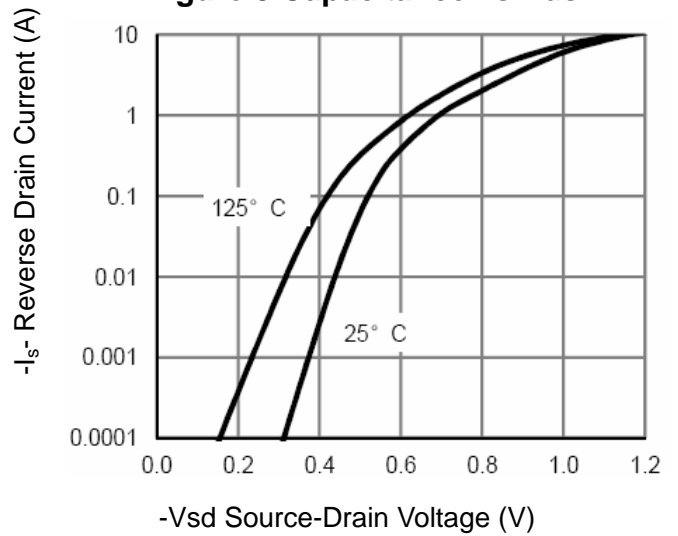

**Figure 10 Source- Drain Diode Forward**

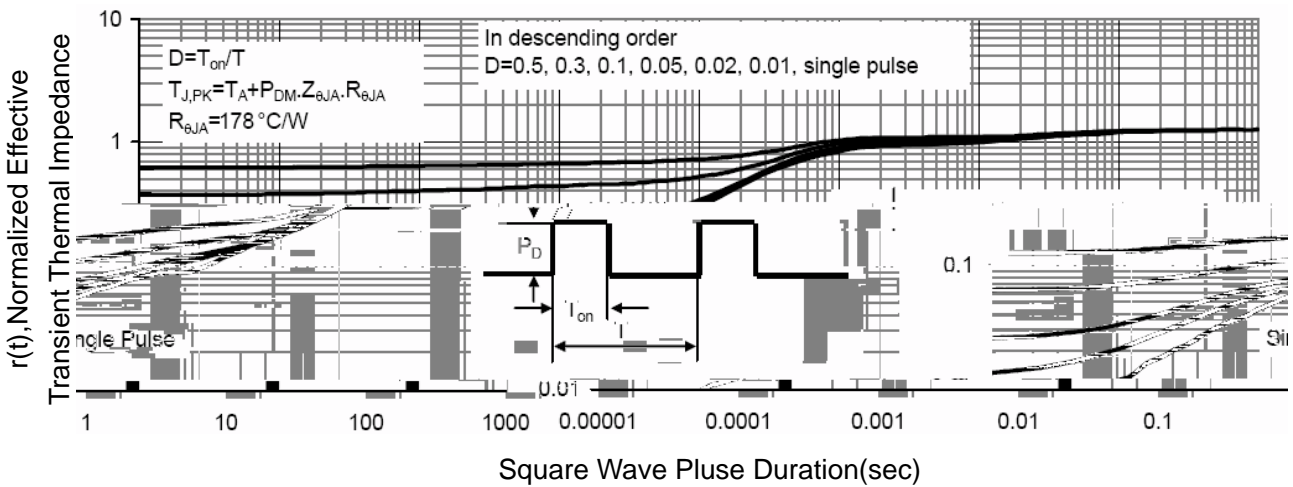

**Figure 11 Normalized Maximum Transient Thermal Impedance**

## Package Mechanical Data-SOT-23

|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |