





MG50P12E2

H DI
C



Motor Drivers
AC and DC servo drive amplifier
UPS (Uninterruptible Power Supplies)

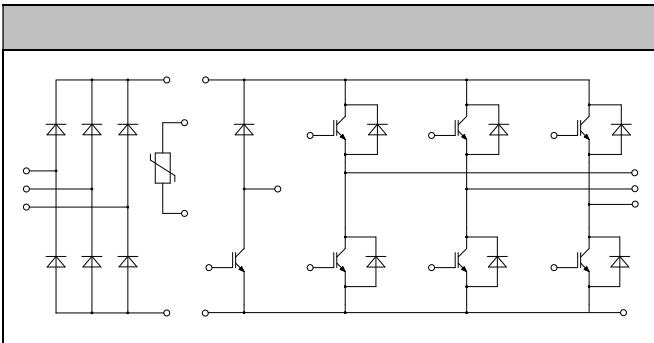

Low switching losses
Low $V_{ce(sat)}$ with positive temperature coefficient
Including fast & soft recovery anti-parallel FWD
Low inductance case
High short circuit capability(10us)
Maximum junction temperature 175°C

□

□

□

□

Collector-Emitter Voltage	V_{CES}	$V_{GE}=0V, I_C=1mA, T_{vj}=25$	1200	V
Continuous Collector Current	I_C	$T_c=100$ $v_{jmax} \leq 175$	50	A
Repetitive Peak Collector Current	I_{CRM}	$t_p=1ms$	100	A
Gate-Emitter Voltage	V_{GES}	$T_{vj}=25$	20	V
Total Power Dissipation	P_{tot}	$T_c=25$ $T_{vjmax}=175$	288	W



MG50P12E2



Gate-emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C=1.7mA, T_{vj}=25$	5.2	5.8	6.4	V	
Collector-Emitter Cut-off Current	I_{CES}	$V_{CE}=1200V, V_{GE}=0V, T_{vj}=25^{\circ}C$			1.0	mA	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=50A, V_{GE}=15V, T_{vj}=25$		1.90	2.30	V	
		$I_C=50A, V_{GE}=15V, T_{vj}=125$		2.20			
		$I_C=50A, V_{GE}=15V, T_{vj}=150$		2.30			
Gate Charge	Q_G			0.35		uC	
Input Capacitance	C_{ies}	$V_{CE}=25V, V_{GE}=0V,$ $f=1MHz, T_{vj}=25^{\circ}C$		2.60		nF	
Reverse Transfer Capacitance	C_{res}			0.10		nF	
Gate-Emitter leakage current	I_{GES}	$V_{CE}=0V, V_{GE}=20V, T_{vj}=25$			400	nA	
Turn-on Delay Time	$t_{d(on)}$	$I_C=50A$ $V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_G=15\Omega$ $T_{vj}=25$		168		ns	
Rise Time	t_r			34		ns	
Turn-off Delay Time	$t_{d(off)}$			320		ns	
Fall Time	t_f			78		ns	
Energy Dissipation During Turn-on Time	E_{on}			5.42		mJ	
Energy Dissipation During Turn-off Time	E_{off}			4.15		mJ	
Turn-on Delay Time	$t_{d(on)}$		$I_C=50A$ $V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_G=15\Omega$ $T_{vj}=125$		175		ns
Rise Time	t_r				42		ns
Turn-off Delay Time	$t_{d(off)}$				426		ns
Fall Time	t_f				148		ns
Energy Dissipation During Turn-on Time	E_{on}			7.26		mJ	
Energy Dissipation During Turn-off Time	E_{off}			5.80		mJ	
SC Data	I_{sc}	$T_p \leq 10\mu s, V_{GE}=15V, T_{vj}=150$, $V_{cc}=900V, V_{CEM} \leq 1200V$			220		A



MG50P12E2



Parameter	Symbol	Conditions	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	$T_{vj}=25$	1200	V
Continuous DC Forward Current	I_F		50	A
Repetitive Peak Forward Current	I_{FRM}	$t_p=1ms$	100	A
I ² t-value	I^2t	$V_R=0, t_p=10ms, T_{vj}=125$	560	A ² s
		$V_R=0, t_p=10ms, T_{vj}=150$	480	

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Forward Voltage	V_F	$I_F=50A, T_{vj}=25$		2.10	2.50	V
		$I_F=50A, T_{vj}=125$		2.15		
		$I_F=50A, T_{vj}=150$		2.15		
Recovered Charge	Q_{rr}	$I_F = 50 A$		5.8		uC
Peak Reverse Recovery Current	I_{rr}	$V_R=600V$ $-di_F/dt = 1500A/us$		56		A
Reverse Recovery Energy	E_{rec}	$T_{vj}=25$		1.85		mJ
Recovered Charge	Q_{rr}	$I_F = 50 A$		9.1		uC
Peak Reverse Recovery Current	I_{rr}	$V_R=600V$ $-di_F/dt = 1500A/us$		58		A
Reverse Recovery Energy	E_{rec}	$T_{vj}=125$		3.30		mJ



MG50P12E2



Collector-Emitter Voltage	V_{CES}	$V_{GE}=0V, I_C=1mA, T_{vj}=25$	1200	V
Continuous Collector Current	I_C	$T_c=100$ $v_{jmax}=175$	35	A
Repetitive Peak Collector Current	I_{CRM}	$tp=1ms$	70	A
Gate-Emitter Voltage	V_{GES}	$T_{vj}=25$	20	V
Total Power Dissipation	P_{tot}	$T_c=25$ $T_{vjmax}=175$	227	W

Gate-emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C=1.4mA, T_{vj}=25$	5.2	5.8	6.4	V
Collector-Emitter Cut-off Current	I_{CES}	$V_{CE}=1200V, V_{GE}=0V, T_{vj}=25^\circ C$			1.0	mA
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=35A, V_{GE}=15V, T_{vj}=25$		1.85	2.25	V
		$I_C=35A, V_{GE}=15V, T_{vj}=125$		2.15		
		$I_C=35A, V_{GE}=15V, T_{vj}=150$		2.25		
Gate Charge	Q_G			0.27		uC
Input Capacitance	C_{ies}	$V_{CE}=25V, V_{GE}=0V,$ $f=1MHz, T_{vj}=25^\circ C$		2.00		nF
Reverse Transfer Capacitance	C_{res}			0.07		nF
Gate-Emitter leakage current	I_{GES}	$V_{CE}=0V, V_{GE}=20V, T_{vj}=25$			400	nA
Turn-on Delay Time	$t_{d(on)}$	$I_C=35A$ $V_{CE}=600V$ $V_{GE}=\pm 15V$ $R_G=12\Omega$ $T_{vj}=25$		25		ns
Rise Time	t_r			13		ns
Turn-off Delay Time	$t_{d(off)}$			24		ns
Fall Time	t_f			115		ns
Energy Dissipation During Turn-on Time	E_{on}			1.90		mJ
Energy Dissipation During Turn-off Time	E_{off}			2.00		mJ



MG50P12E2



Turn-on Delay Time	$t_{d(on)}$	$I_C = 35\text{ A}$ $V_{CE} = 600\text{ V}$ $V_{GE} = \pm 15\text{ V}$ $R_G = 12\Omega$ $T_{vj} = 125$	25	ns
Rise Time	t_r		16	ns
Turn-off Delay Time	$t_{d(off)}$		295	ns
Fall Time	t_f		170	ns
Energy Dissipation During Turn-on Time	E_{on}		2.90	mJ
Energy Dissipation During Turn-off Time	E_{off}		2.90	mJ
SC Data	I_{sc}		$T_p \leq 10\mu s, V_{GE} = 15\text{ V}, T_{vj} = 150$, $V_{cc} = 900\text{ V}, V_{CEM} \leq 1200\text{ V}$	150

Repetitive Peak Reverse Voltage	V_{RRM}	$T_j = 25$	1200	V
Continuous DC Forward Current	I_F		15	A
Repetitive Peak Forward Current	I_{FRM}	$t_p = 1\text{ ms}$	30	A
I ² t-value	I ² t	$V_R = 0, t_p = 10\text{ ms}, T_j = 125$	16.0	A ² s
		$V_R = 0, t_p = 10\text{ ms}, T_j = 150$	14.0	

Forward Voltage	V_F	$I_F = 15\text{ A}, T_{vj} = 25$	2.00	V
		$I_F = 15\text{ A}, T_{vj} = 125$	2.10	
		$I_F = 15\text{ A}, T_{vj} = 150$	2.10	
Recovered Charge	Q_{rr}	$I_F = 15\text{ A}$	1.10	μC
Peak Reverse Recovery Current	I_{rr}	$V_R = 600\text{ V}$ $-di_F/dt = 550\text{ A}/\mu\text{s}$	12.0	A
Reverse Recovery Energy	E_{rec}	$T_{vj} = 25$	0.30	mJ
Recovered Charge	Q_{rr}	$I_F = 15\text{ A}$	1.90	μC
Peak Reverse Recovery Current	I_{rr}	$V_R = 600\text{ V}$ $-di_F/dt = 550\text{ A}/\mu\text{s}$	14.0	A
Reverse Recovery Energy	E_{rec}	$T_{vj} = 125$	0.60	mJ



MG50P12E2



Parameter	Symbol	Conditions	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	$T_j=25$	1600	V
Average output Current 50/60Hz, sine wave	$I_{F(AV)}$	$T_c=100$	65	A
Maximum RMS Current at Rectifier Output	I_{RMSM}	$T_c=100$	110	A
Surge Forward Current	I_{FSM}	$V_R=0, t_p=10ms, T_j=45$	850	A
I^2t -value	I^2t	$V_R=0, t_p=10ms, T_j=45$	3610	A ² s

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Diode Forward Voltage	V_F	$I_F=50A, T_j=125$		1.0		V
Reverse Current	I_R	$T_j=125, V_R=1600V$			1.5	mA


Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Rated Resistance	R_{25}			5.0		k
Deviation of R100	R/R	$T_c=100, R_{100}=493.3$	-5		5	%
Power Dissipation	P_{25}				20.0	mW
B-value	$B_{25/50}$	$R_2=R_{25}\exp[B_{25/50}(1/T_2-1/(298.15 K))]$		3375		K







MG50P12E2







Isolation voltage	V_{isol}	$t=1min, f=50Hz$	2500			V
Maximum Junction Temperature	T_{jmax}				175	
Operating Junction Temperature	$T_{vj op}$		-40		150	
Storage Temperature	T_{stg}		-40		125	

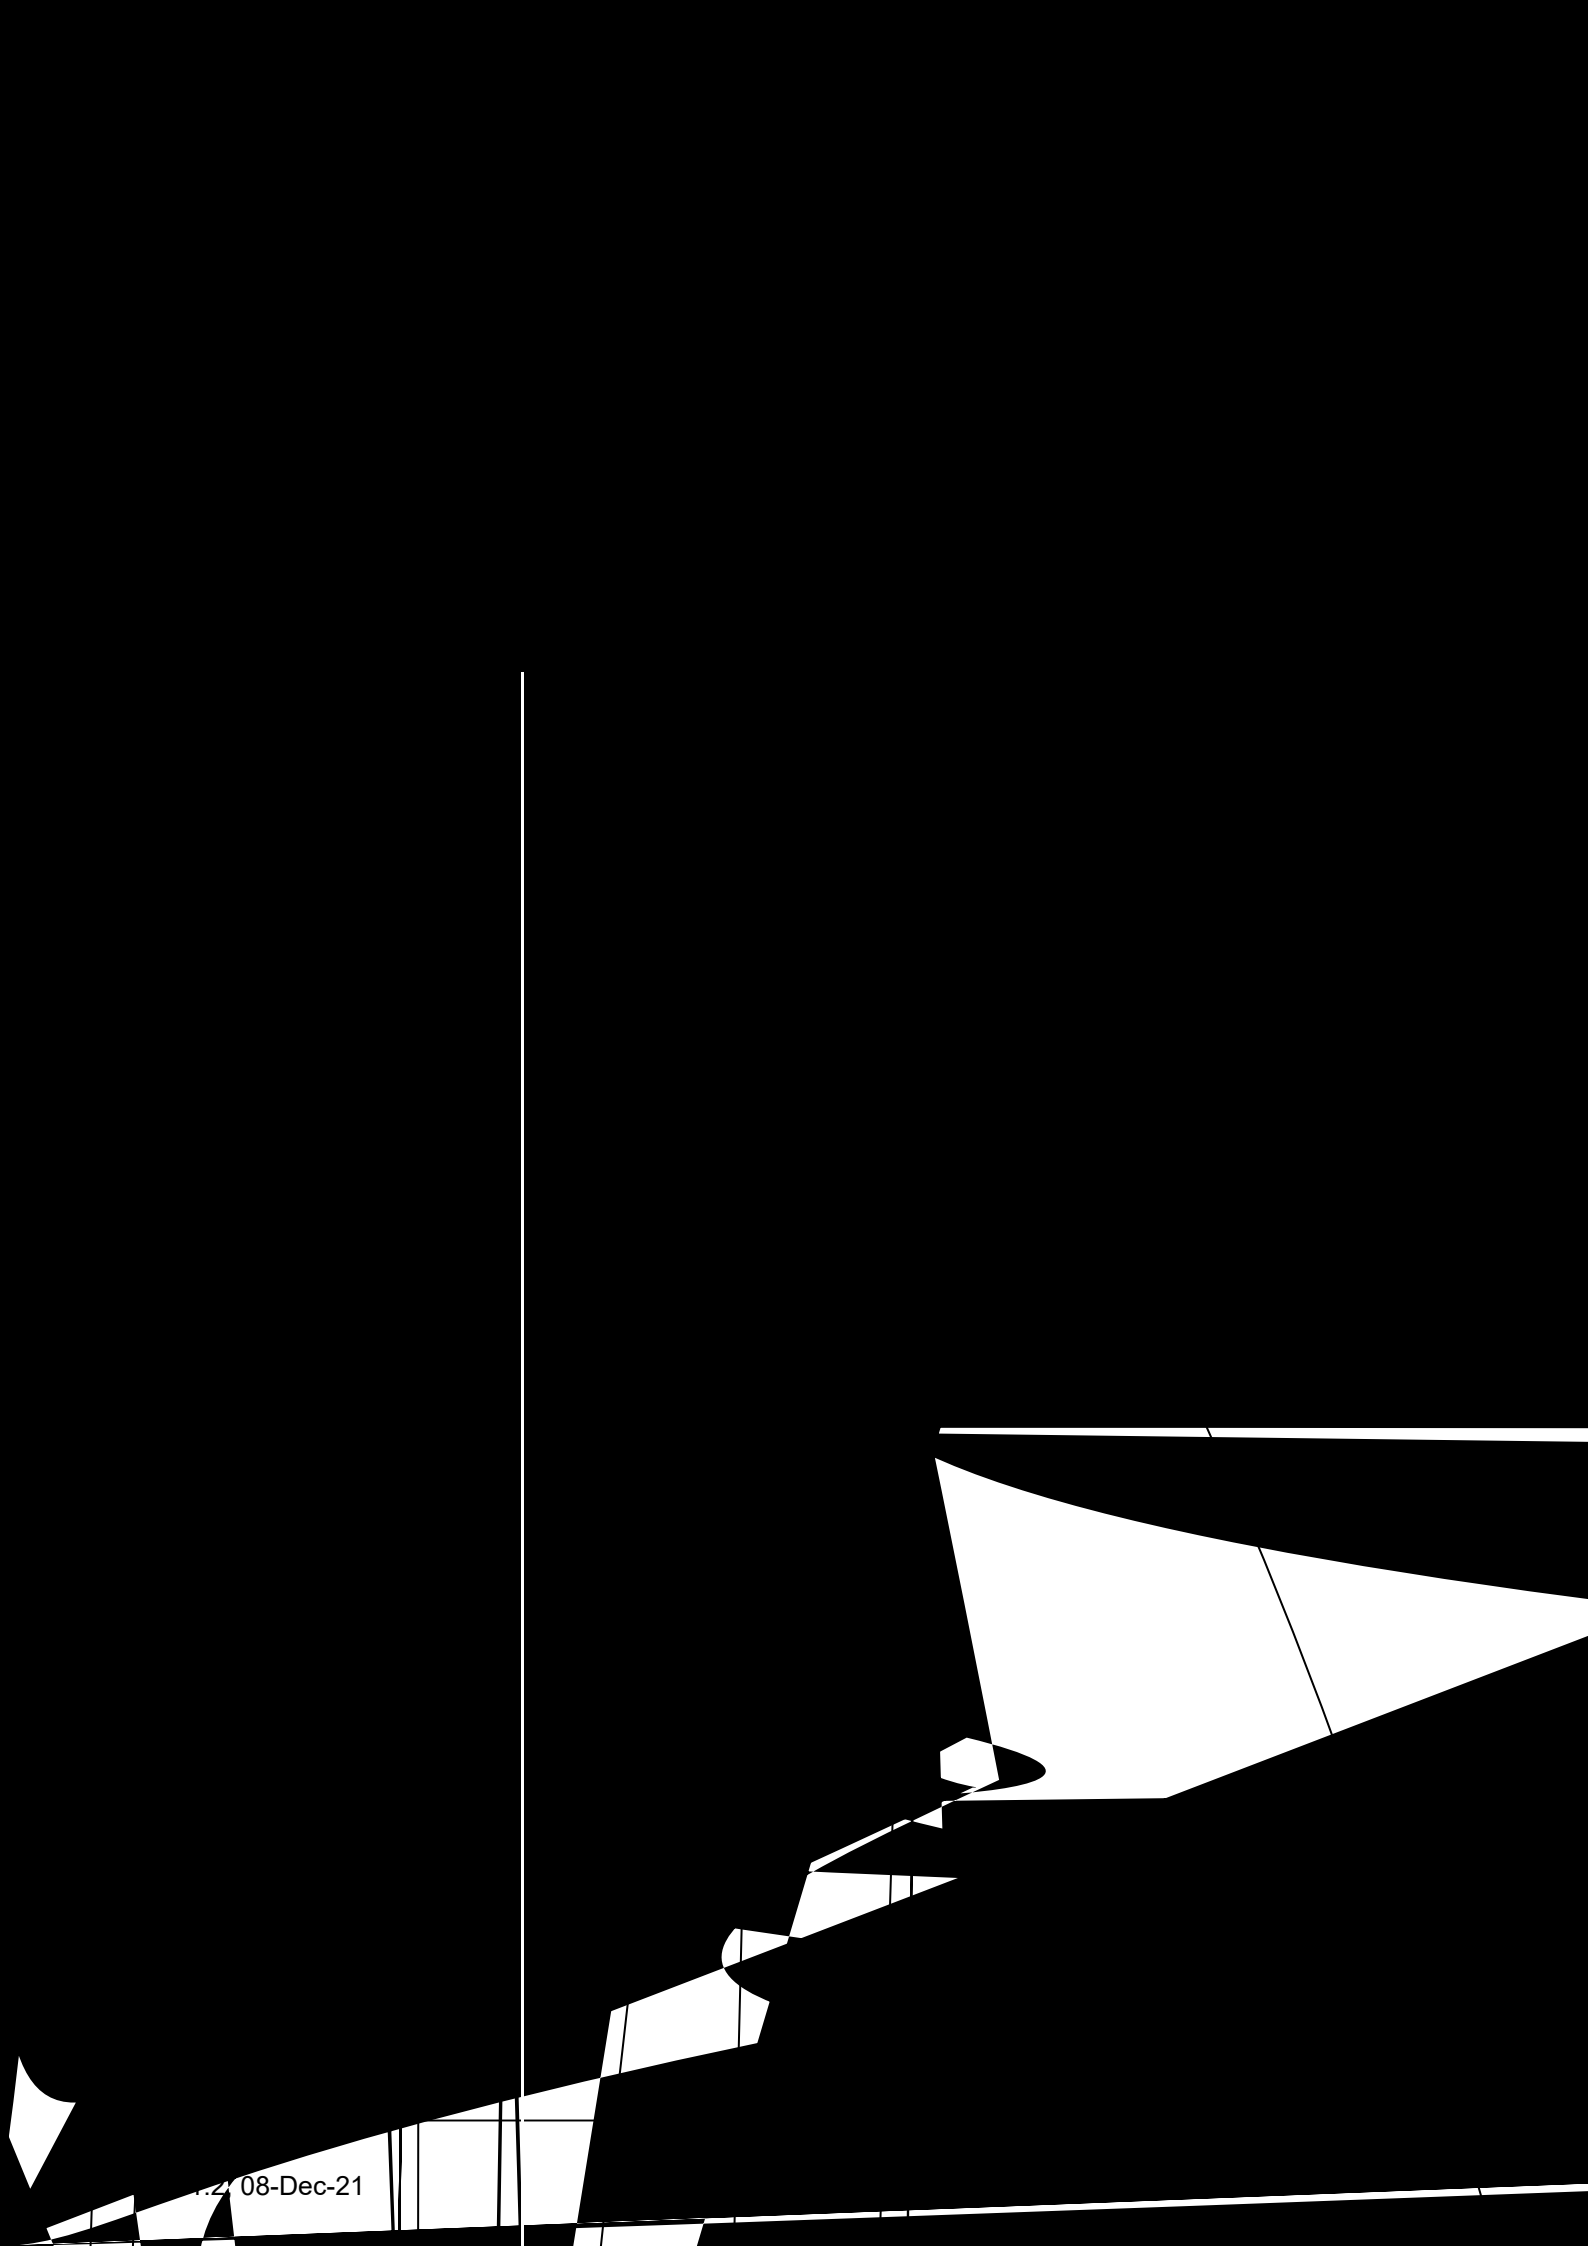

08-Dec-21

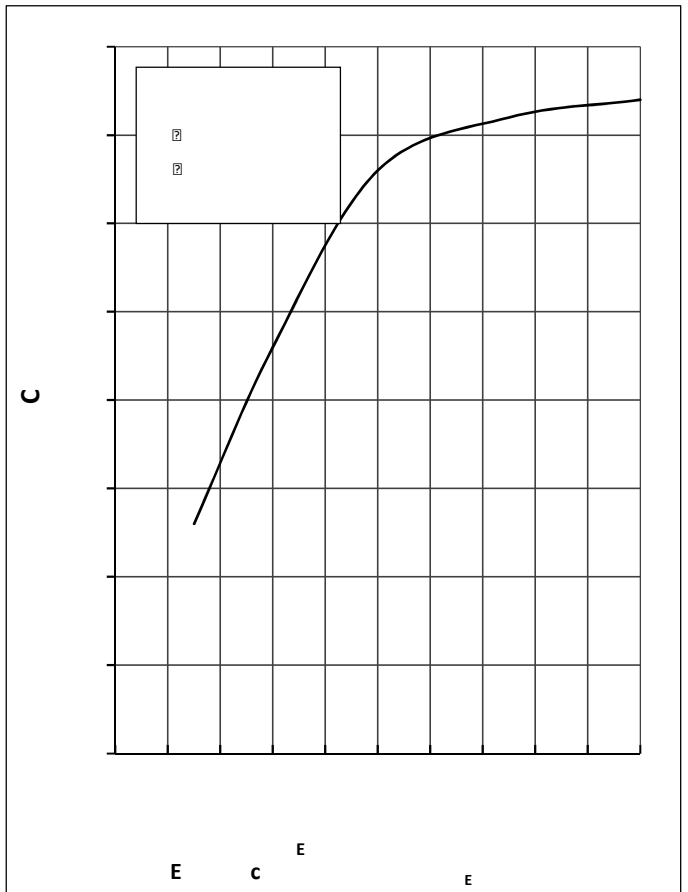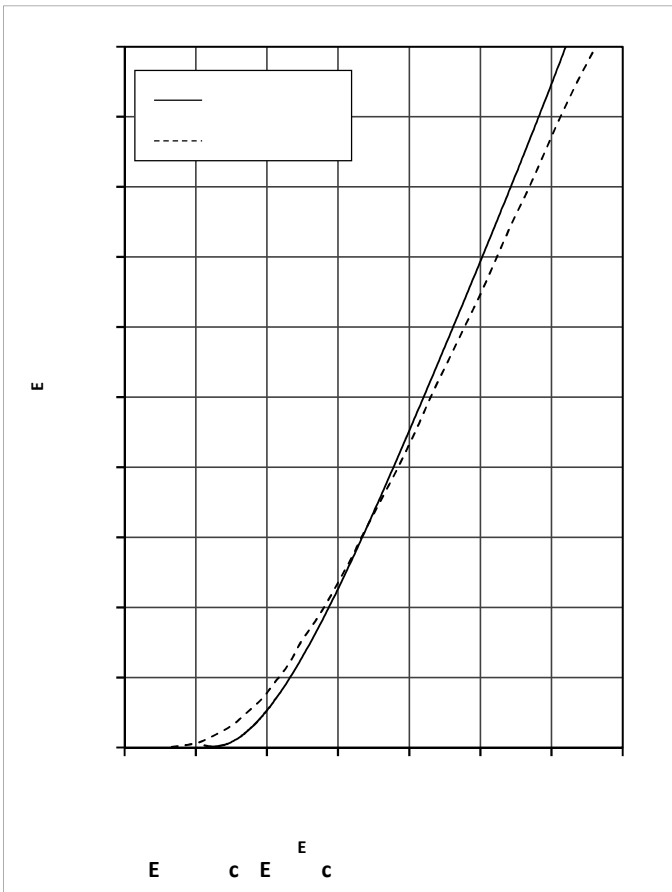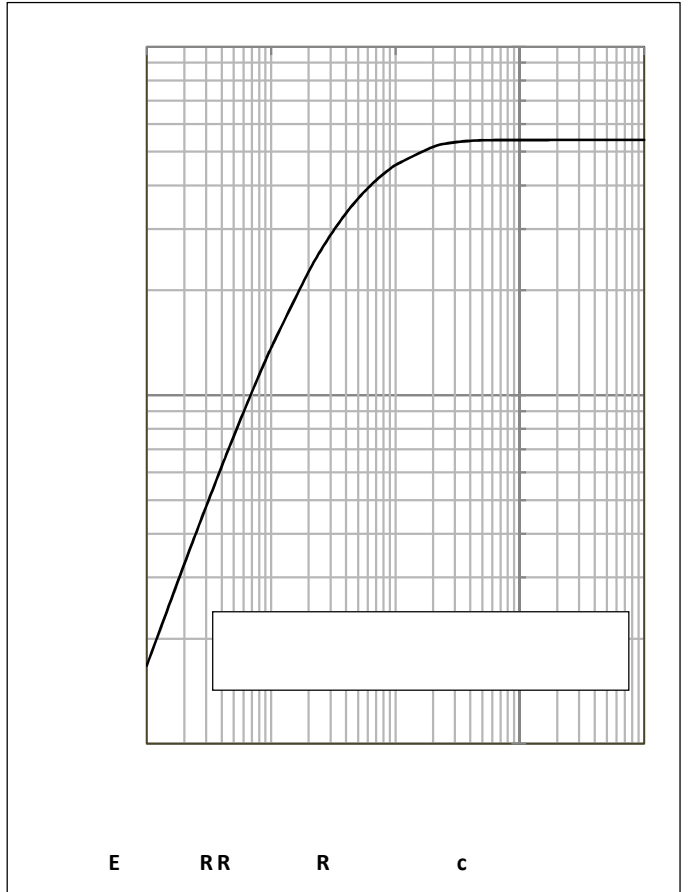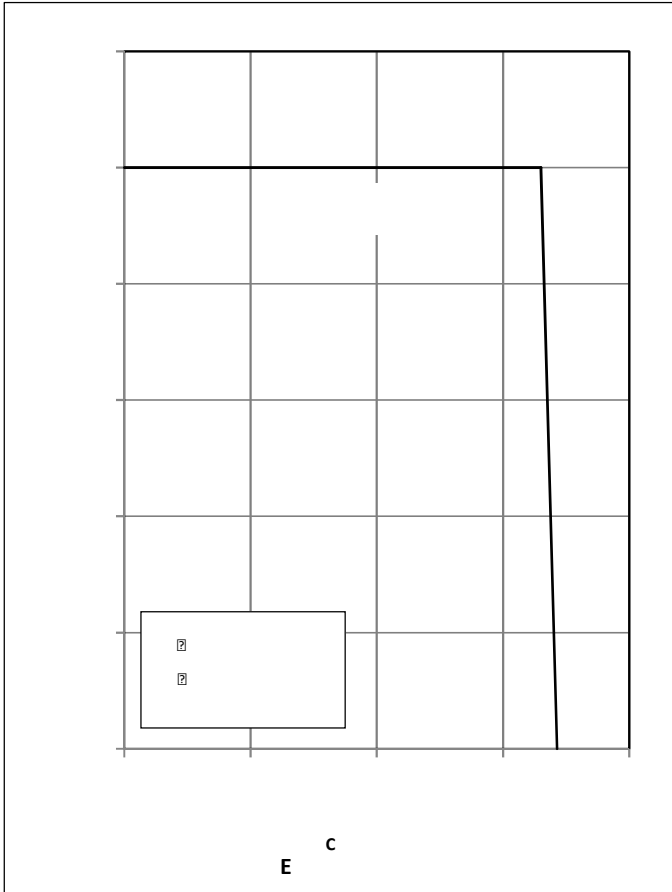

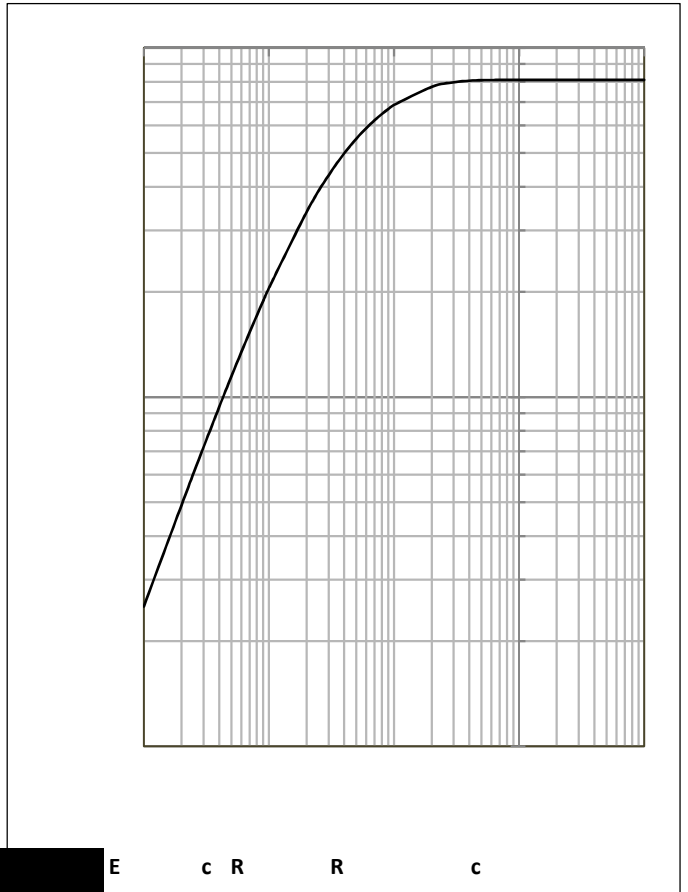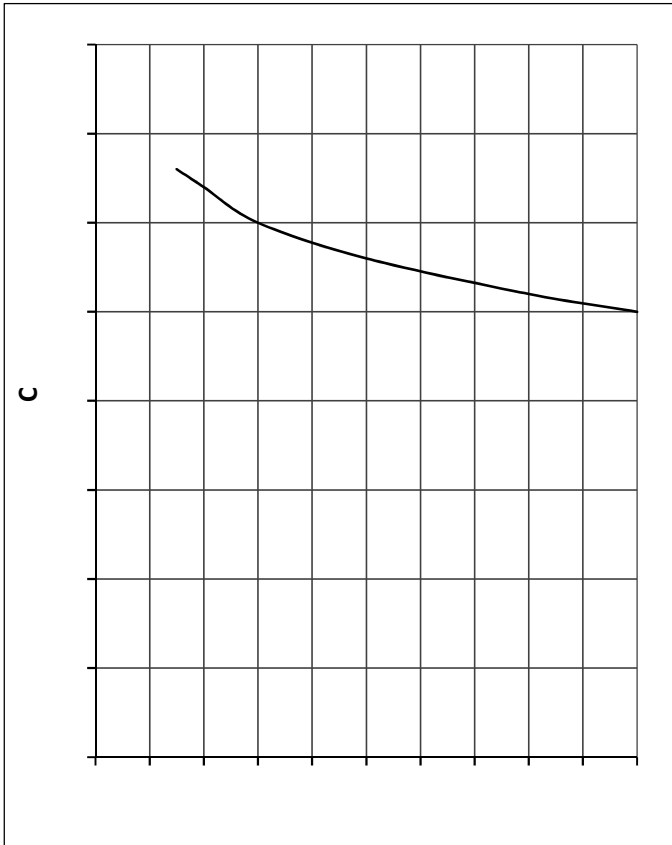

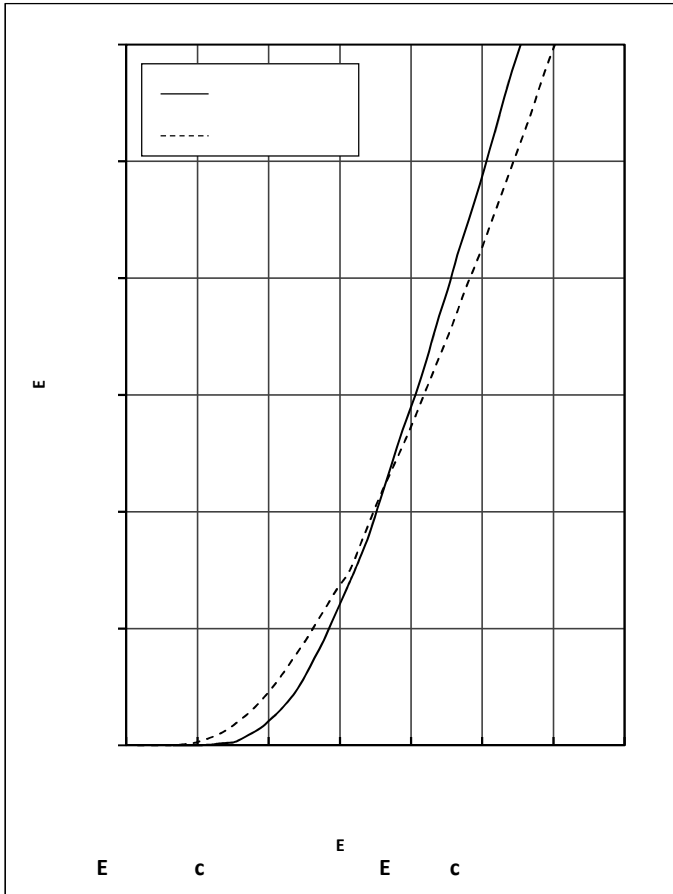



MG50P12E2

H DI
C

