



一级代理商：

深圳市弗瑞鑫电子有限公司
地址：深圳市宝安区西乡大道 号金源商务大厦B座三楼

：

A ：

www.frxelec.com



- ()

				*			

•




□

□


□

- - - - ()



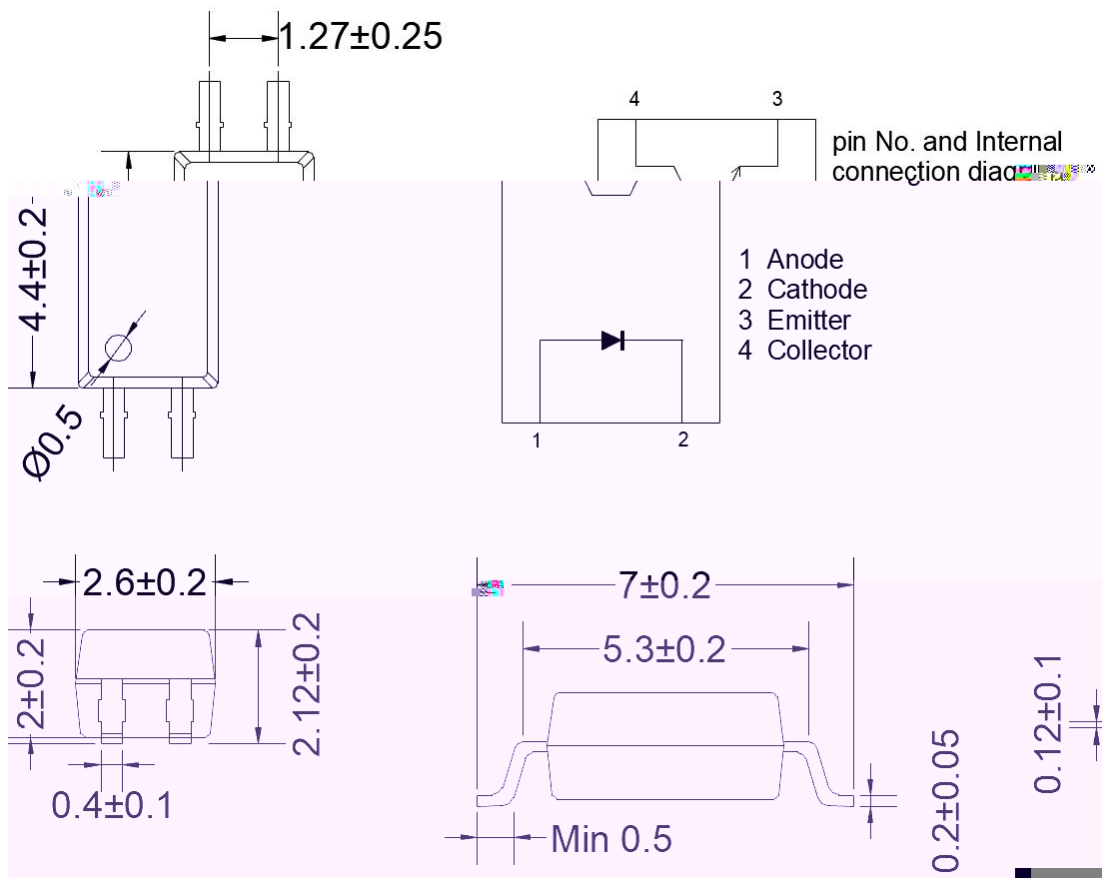


() ()

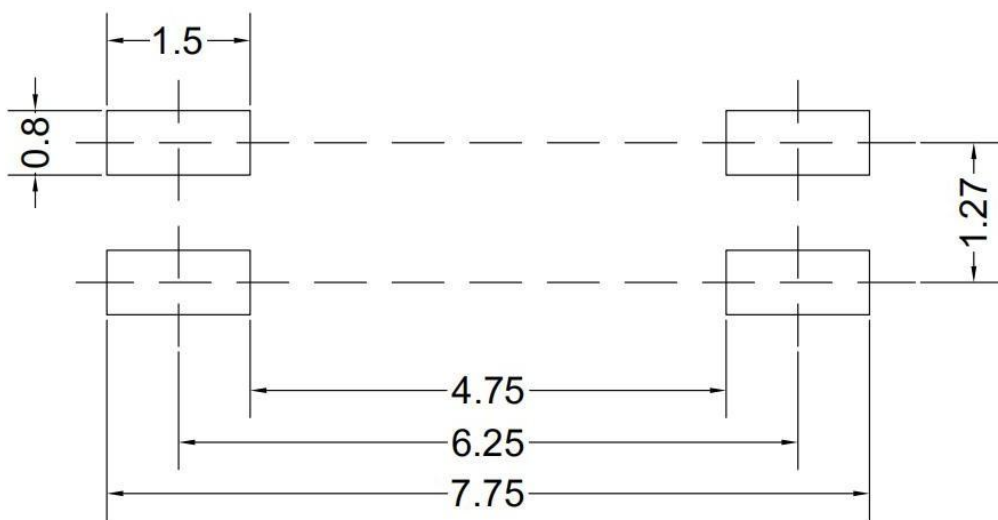




() - -

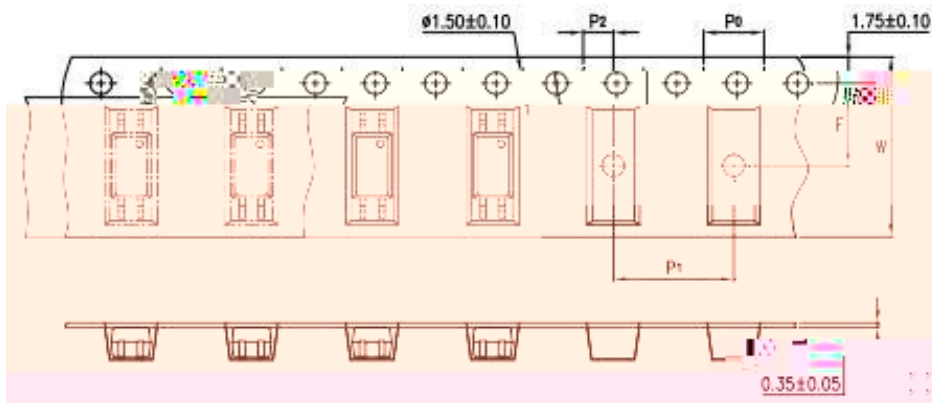

() - -

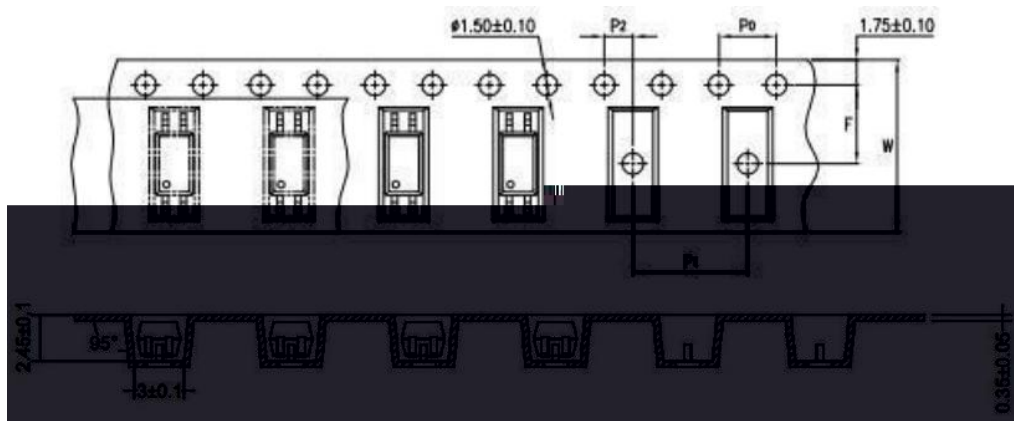



()

()

ORIENT
ShenZhen Orient Components Co.,LTD

Material Code : 120PCXXXXXX

P/N : OR-XXXXXX

Lot No. : XXXXXX-XXXXX-TX-X

Qty : XXXX PCS

“XXXXXXXXXXXXXXXXXX” (一体机序列码)

Made in China

DE UL RoHS REACH


内箱码 外箱码



()



()

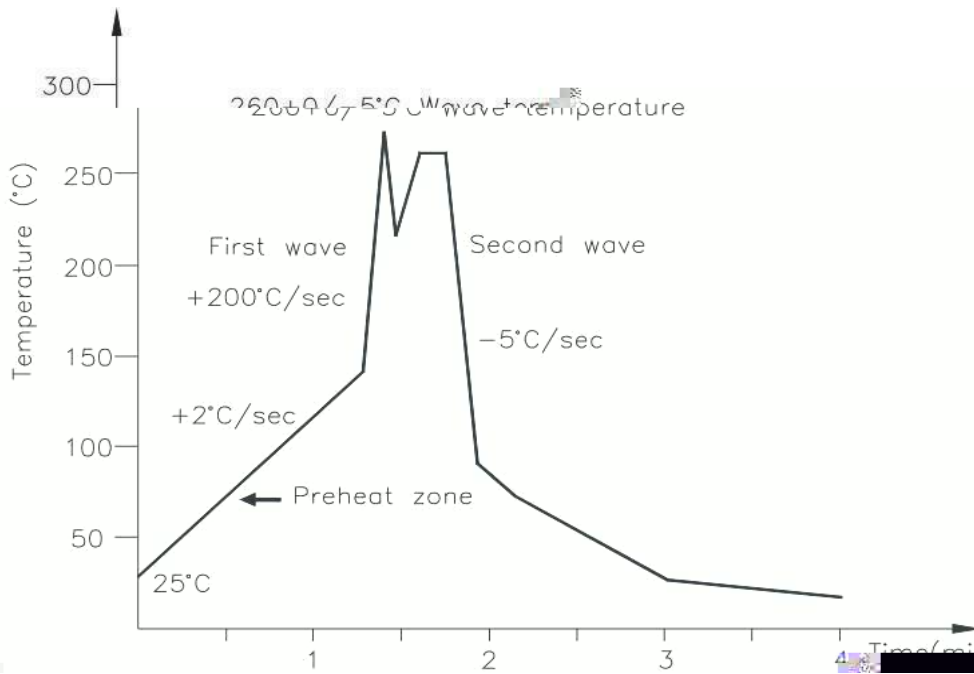

Temperature	380+0/-5°C
Time	3 sec max



KA



Figure 7. Collector-Emitter Saturation Voltage vs. Forward

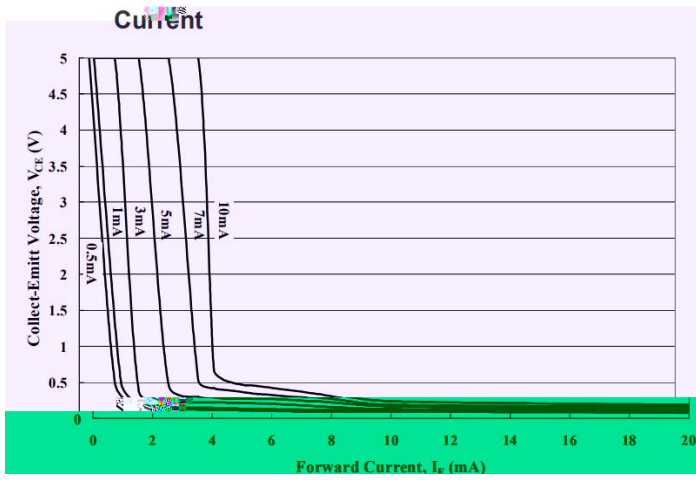


Figure 8. Collector Current vs. Collector-Emitter

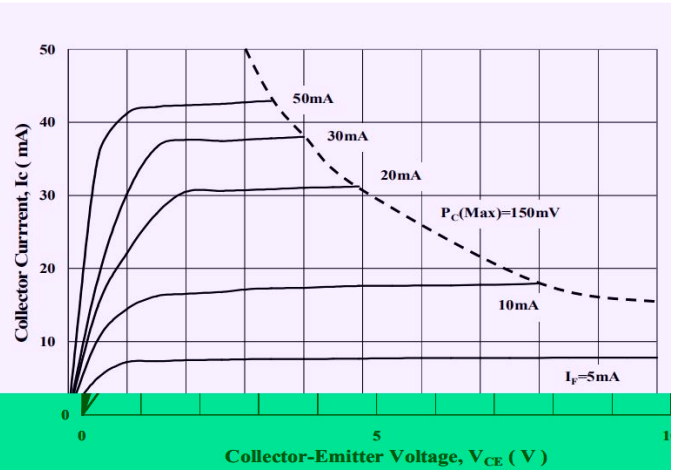


Figure 9. Collector Current vs. Small Collector-Emitter

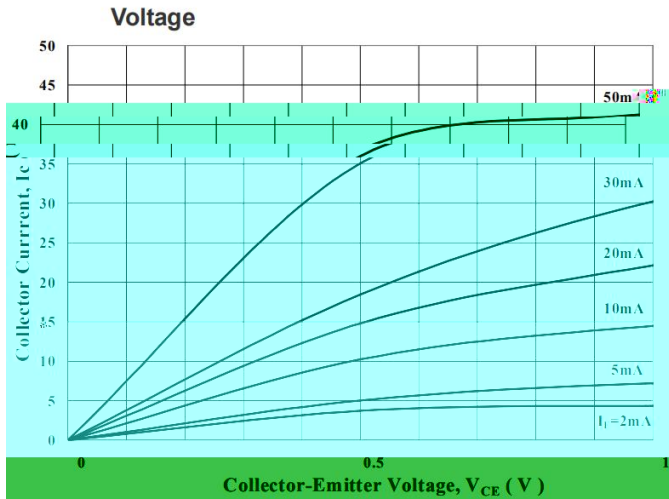


Figure 10. Normalized CTR vs. Forward Current

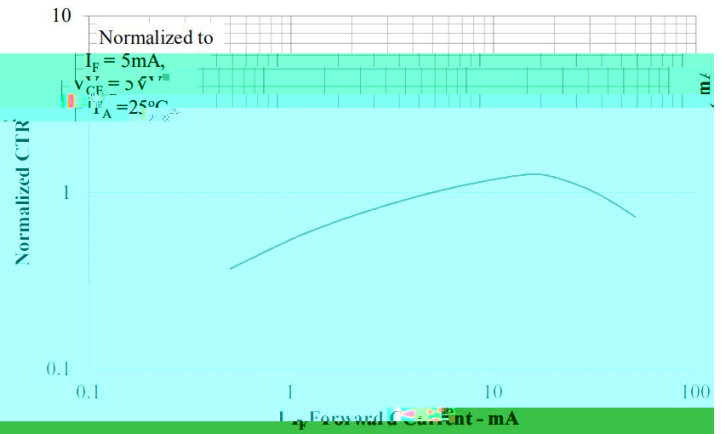


Figure 11. Collector Dark Current vs. Ambient Temperature

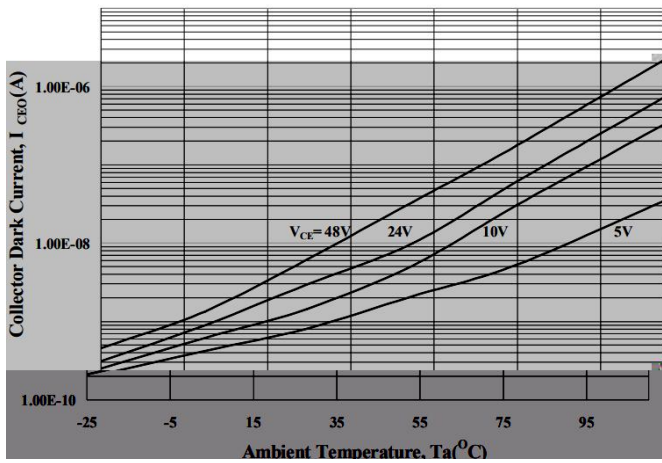


Figure 12. Current Transfer Ratio vs. Forward

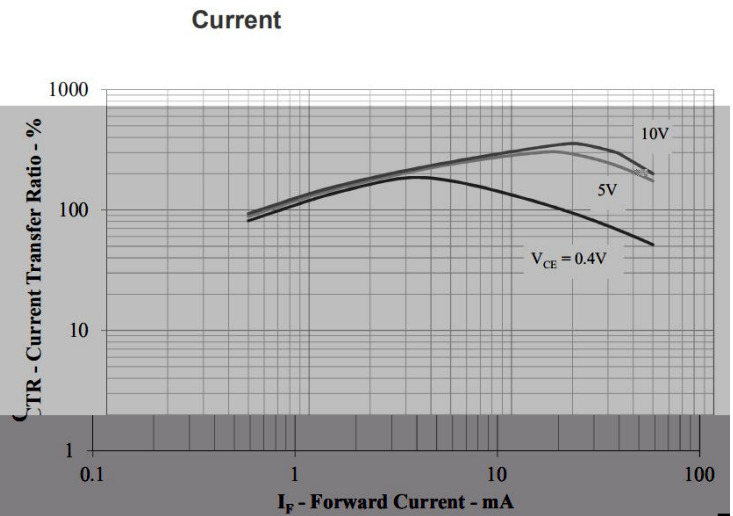




Figure 13. Normalized CTR vs. Ambient Temperature

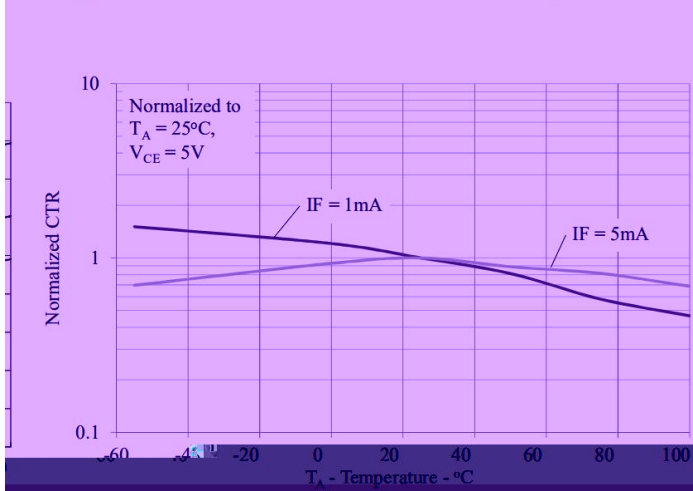


Figure 14. Collector-Emitter Saturation Voltage vs. Ambient Temperature

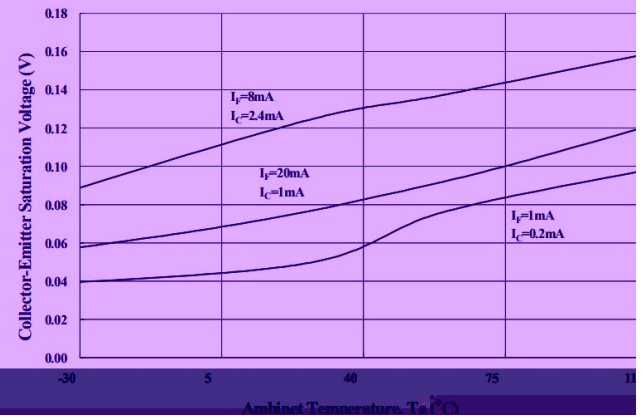


Figure 15. Collector Current vs. Ambient Temperature

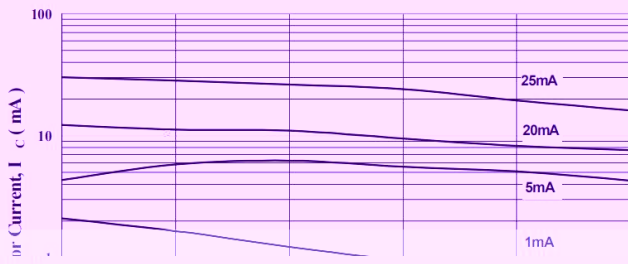


Figure 16. Switching Time vs. Load Resistance

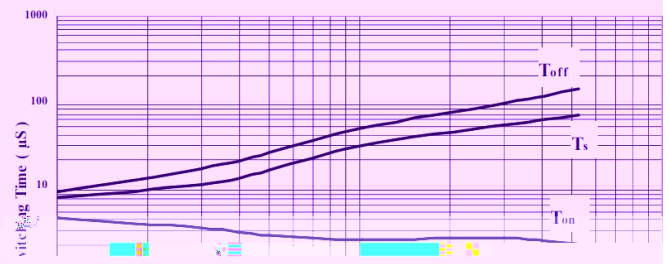


Figure 17. Switching Time vs. Ambient Temperature

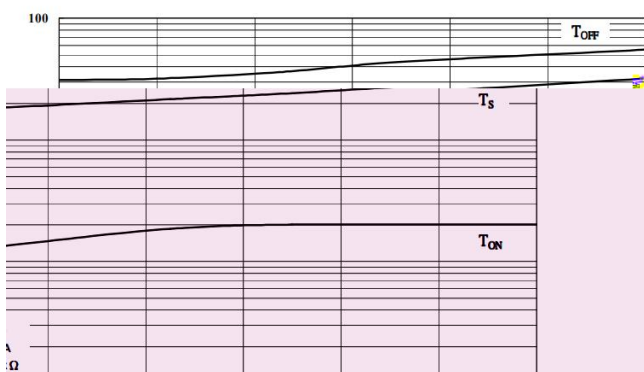


Figure 18. Frequency Response

